



Rectified Wall Tile Sizes



White - WHI
ECOCALWHI1236P - 12"x36" Rectified Wall Tile - Plain/Flat

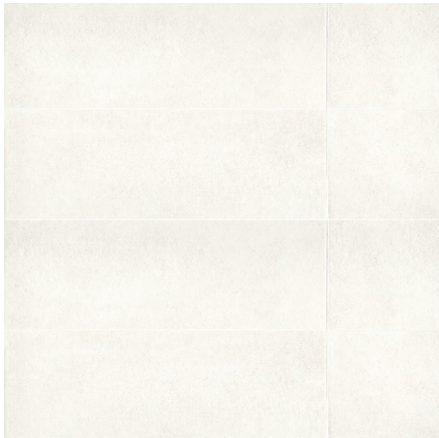


Beige - BEI
ECOCALBEI1236P - 12"x36" Rectified Wall Tile - Plain/Flat

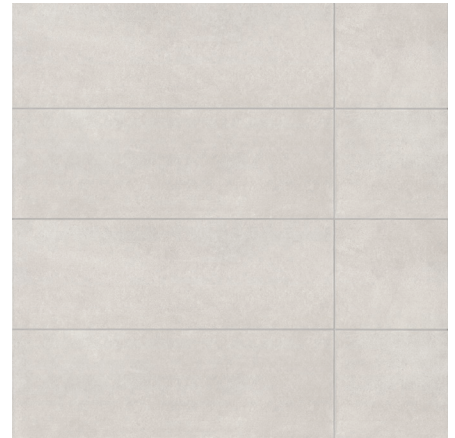


Grey - GRE
ECOCALGRE1236P - 12"x36" Rectified Wall Tile - Plain/Flat



White - WHI
ECOCALWHI12363D - 12"x36" Rectified Wall Tile - 3D

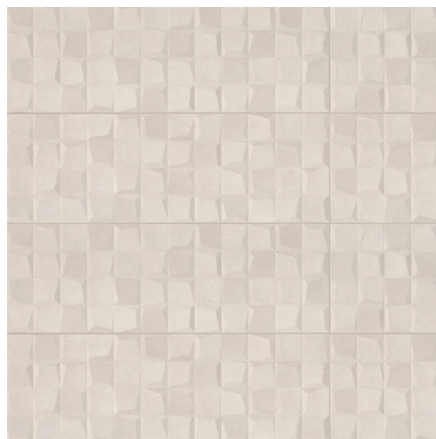

Beige - BEI
ECOCALBEI12363D - 12"x36" Rectified Wall Tile - 3D

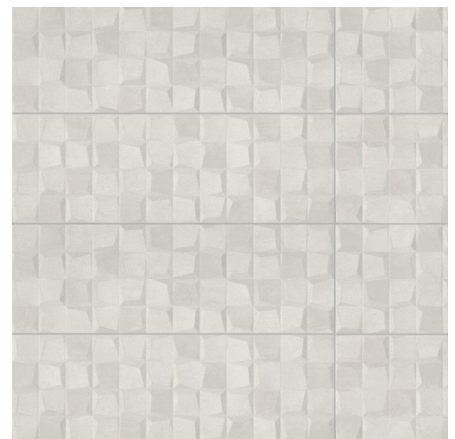



Grey - GRE
ECOCALGRE12363D - 12"x36" Rectified Wall Tile - 3D






SIZING & PACKAGING

| Type | Shape | Item Code | Size | Description | Pcs / Ctn | Sf / Ctn |
|-----------|---|-----------------|---------|----------------------------------|-----------|----------|
| Wall Tile |  | ECOCAL***1236P | 12"x36" | Rectified Wall Tile - Plain/Flat | 4 | 11.63 |
| |  | ECOCAL***12363D | 12"x36" | Rectified Wall Tile - 3D | 4 | 11.63 |

ANSI TECHNICAL SPECIFICATIONS


| | DCOF Acutest | PEI Rating ASTM# C1027 | Frost Resistant ASTM# C1026 | Scratch Resistance MOHS | Breaking Strength ASTM# C648 | Water Absorption ASTM# C373 | Chemical Resistance ASTM# C650 |
|---------|-----------------|------------------------------|-----------------------------------|-------------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| Results | N/A | N/A | N/A | N/A | Pass (≥ 600 ISO) | > 1.0 (Ceramic) | Unaffected |

Shade Variation




APPLICATIONS

| | Floors | Walls | Countertops | Shower Floors | Shower Walls | Pools/Spas |
|-------------|--------|-------|-------------|---------------|--------------|------------|
| Residential | | ● | | | ● | |
| Commercial | | ● | | | ● | |



LEGEND

- Product rated for Interior & Exterior use
- Applications & ANSI Technical Specifications do not apply
- Product rated for Interior use only
- * Special Order only
- † May be suitable for Exterior Floors



It is recommended to install deco tiles without an offset. This tile is only intended for wall applications. Conduct a dry mock layout prior to installation to ensure the direction matches on all tiles.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

