

### Field Tile Sizes



White - WHI DECURBWHI2510 - 2 1/2"x10"



Sand - SAN DECURBSAN2510 - 2 1/2"x10"



Grit - GRI DECURBGRI2510 - 2 1/2"x10"



Loft - LOF DECURBLOF2510 - 2 1/2"x10"




Exposed - EXP DECURBEXP2510 - 2 1/2"x10"



Black - BLA DECURBBLA2510 - 2 1/2"x10"



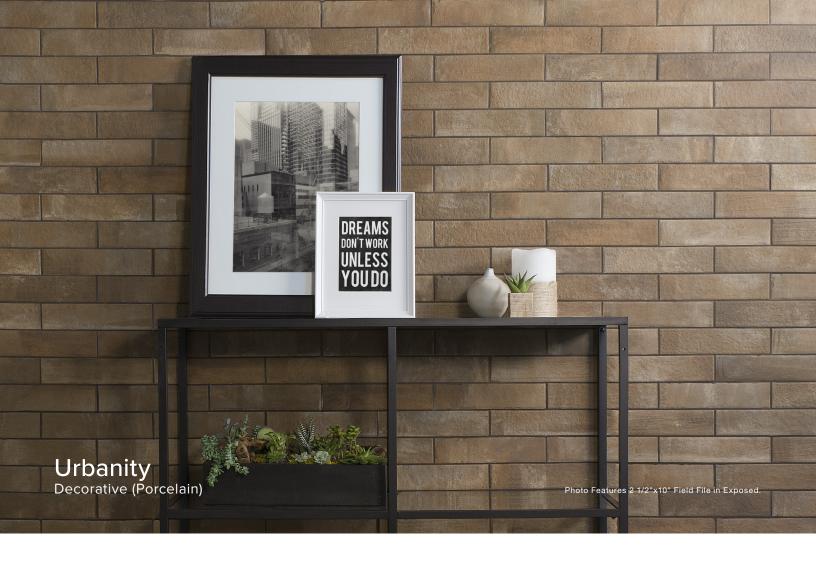

#### SIZING & PACKAGING

Shape Item Code Size Description Pcs / Ctn Sf / Ctn Type Field DECURB•••2510 2 1/2"x10" Field Tile 34 5.4880

## ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650	Bond Strength A137.2-7.7	Thermal Shock ASTM# C484
Results	≥ 0.42	N/A	≥ 250 lbf	≤ 0.5%	Unaffected	N/A	N/A

# **APPLICATIONS**


	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	•	•	•	•	•	•
Light Commercial	•	•	•	•	•	•
Commercial	•	•	•	•	•	•

#### LEGEND

 Product rated for Interior & Exterior use Product rated for Interior use only † May be suitable for Exterior Floors

Applications & ANSI Technical Specifications do not apply \* Special Order only





V3-Moderate







Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field and trim tile may not be an exact match. We reserve the right to make changes to product specifications at any time without notice. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Reference the most current TCNA Handbook, ANSI, manufacturer's specifications, and the Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, and/or use voids warranty. Please visit www.bedrosians.com for current product information.