Serenity Glazed Porcelain



Beige




ELMSERBEI1212 - 12"x12" ELMSERBEI1818 - 18"x18"

Grey



ELMSERGRE1212 - 12"x12" ELMSERGRE1818 - 18"x18"

White

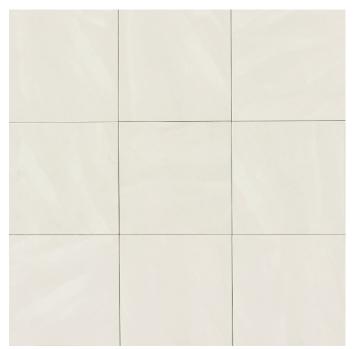

ELMSERWHI1212 - 12"x12" ELMSERWHI1818 - 18"x18"




Sizing & Packaging


| Ту | pe | Size | Item Code | Pcs / Ctn | Sf / Ctn | Ctn / Plt | Sf / Plt |
|-----|------------|---------------|----------------|-----------|----------|-----------|----------|
| Fie | eld Tile | 12"x12" | ELMSER•••1212 | 11 | 10.76 | 72 | 774.72 |
| Fie | eld Tile | 18"x18" | ELMSER•••1818 | 7 | 15.28 | 26 | 397.28 |
| Bu | Ilnose | 3"x18" | ELMSER•••318BN | - | - | - | - |
| 2"> | <2" Mosaic | 12"x12" Sheet | ELMSER•••22MO | - | - | - | - |

| Trim | | |
|---------|--------------|------------|
| Shape | Туре | Size |
| | Bullnose | 3"x18" |
| Mosaics | | |
| Shape | Туре | Sheet Size |
| | 2"x2" Mosaic | 12"x12" |

Product Specifications

| Applications | Floors | Walls | Countertops | Shower Floors | Shower Walls | Pools |
|------------------|-----------------|---------------|-------------|---------------|--------------|-------|
| Residential | • | • | • | • | • | • |
| Light Commercial | • | • | • | • | • | • |
| Commercial | • | • | • | • | • | • |
| Legend: Product | r & Exterior us | se • Interior | r use only | | | |







Manufacturer strongly recommends use of a leveling system during installation

| Technical Specifications | Results | ASTM# |
|--------------------------|------------|-------|
| Water Absorption | ≤ 0.50% | C373 |
| PEI Rating | 4 | C1027 |
| Scratch Resistance | 7 | MOHS |
| Frost Resistant | Unaffected | C1026 |
| DCOF Acutest | ≥ 0.42 | N/A |
| Breaking Strength | ≥ 250 lbs | C648 |
| Chemical Resistant | Unaffected | C650 |

O PRODUCT SPECIFICATIONS DO NOT APPLY.



The maximum allowable installation offset is 33%. Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook. Manufacturer strongly recommends use of a leveling system during installation.

Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field and trim tile may not be an exact match. We reserve the right to make changes to product specifications at any time without notice. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product is deemed accepted. Reference the most current TCNA Handbook, ANSI, manufacturer's specifications, and the Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, application, and/or use voids warranty. Please visit www.bedrosians.com for current product information.