

# **Tessuto Glass**

Decorative (Glass & Stone)



White - WHI GLSTESWHIOBPB 3/4"x1" Offset Brick Pattern Tex. Blend (11 3/4"x12" Sheet)



White - WHI GLSTESWHISTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)



Beige - BEI GLSTESBEIOBPB 3/4"x1" Offset Brick Pattern Tex. Blend (11 3/4"x12" Sheet)



Beige - BEI GLSTESBEISTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)



Silver - SIL GLSTESSILOBPB 3/4"x1" Offset Brick Pattern Tex. Blend (11 3/4"x12" Sheet)



Silver - SIL GLSTESSILSTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)



Gray - GRA
GLSTESGRAOBPB
3/4"x1" Offset Brick Pattern Tex. Blend
(11 3/4"x12" Sheet)



Gray - GRA GLSTESGRASTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)



Taupe - TAU GLSTESTAUOBPB 3/4"x1" Offset Brick Pattern Tex. Blend (11 3/4"x12" Sheet)



Taupe - TAU GLSTESTAUSTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)




Dark Gray - DGR GLSTESDGROBPB 3/4"x1" Offset Brick Pattern Tex. Blend (11 3/4"x12" Sheet)



Dark Gray - DGR GLSTESDGRSTB 1/2"x4" Stacked Textured Blend (11 3/4"x12" Sheet)



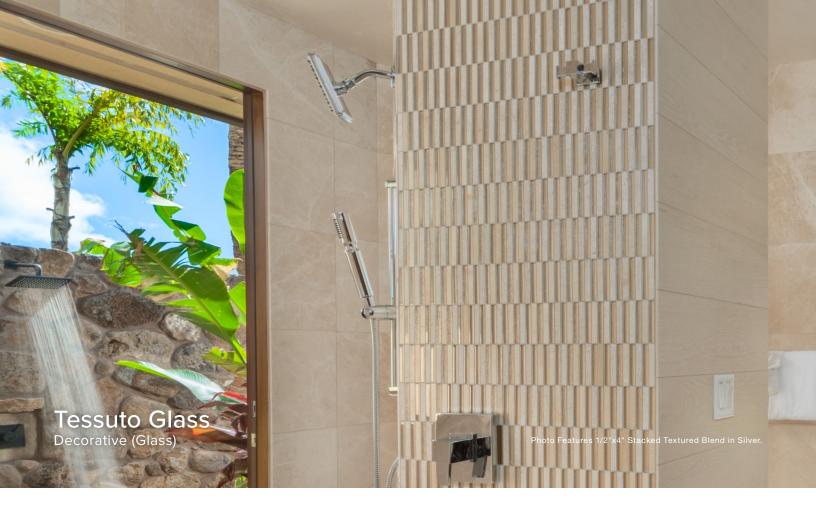

## SIZING & PACKAGING

Туре	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Mosaic		GLSTES•••OBPB	11 3/4"x12" Sheet	3/4"x1" Offset Brick Pattern Textured Blend	10	9.60
		GLSTES•••STB	11 3/4"x12" Sheet	1/2"x4" Stacked Textured Blend	10	10.00

### ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650	Bond Strength A137.2-7.7	Thermal Shock ASTM# C484
Results	N/A	N/A	N/A	N/A	N/A	N/A	N/A

# V2-Slight

Shade Variation

### **APPLICATIONS**

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential		•			•	
Light Commercial		•			•	
Commercial		•			•	

### LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only  $\varnothing$  Applications & ANSI Technical Specifications do not apply

\* Special Order only

† May be suitable for Exterior Floors

Please be aware that white stones installed on shower floors may experience oxidization and rusting.

All natural stone products must be sealed prior to grouting.

Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field, mosaic, and trim tile may not be an exact match. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Check Manufacturer's specifications as some Mosaic tiles may not be appropriate for wet applications. Reference the most current TCNA Handbook, ANSI, Manufacturer's specifications, and Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, application, use, care and maintenance voids warranty. We reserve the right to make changes to product specifications at any time without notice. Please visit www.bedrosians.com for current product information.