

Quarry Basics


---



**Buckskin - 105**  
MET10566 - 6"x6" Field Tile - Honed  
MET10588 - 8"x8" Field Tile - Honed



**Puritan Gray - 507**  
MET50766 - 6"x6" Field Tile - Honed  
MET50788 - 8"x8" Field Tile - Honed

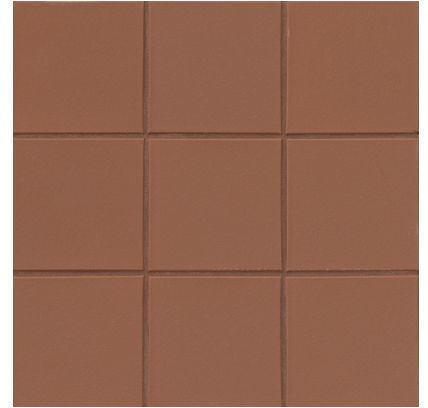

**Mayflower Red - 310**  
MET31048 - 4"x8" Field Tile - Honed  
MET31066 - 6"x6" Field Tile - Honed  
MET31088 - 8"x8" Field Tile - Honed

XA Colors Abrasive

---



**Buckskin - 15XA**  
MET15XA66 - 6"x6" XA Abrasive Field Tile - Honed



**Puritan Gray - 57XA**  
MET57XA66 - 6"x6" XA Abrasive Field Tile - Honed



**Mayflower Red - 31XA**  
MET31XA66 - 6"x6" XA Abrasive Field Tile - Honed


## SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		MET---48*	4"x8"	Field Tile - Honed	32	7.10
		MET---66*	6"x6"	Field Tile - Honed	28	7.00
		MET---88*	8"x8"	Field Tile - Honed	16	7.10
Trim		MET---Q1665*	6"x6"	Bullnose - Honed	14	-
		MET---QC1665	6"x6"	Bullnose Corner - Honed	14	-
		Ø MET---Q3565*	6"x6"	Round Top Cove Base - Honed	14	-
		Ø MET---QB3565*	6"x6"	Round Top Cove Base Inside Corner - Honed	14	-
		Ø MET---QCL3565*	6"x6"	Round Top Cove Base Left Corner - Honed	14	-
		Ø MET---QCR3565*	6"x6"	Round Top Cove Base Right Corner - Honed	14	-
		Ø MET---Q3585*	6"x7 5/8"	Round Top Cove Base - Honed	14	-
		Ø MET---QCL3585*	6"x7 5/8"	Round Top Cove Base Left Corner - Honed	14	-
		Ø MET---QCR3585*	6"x7 5/8"	Round Top Cove Base Right Corner - Honed	14	-

## ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C501	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	Pass > 80 ASTM C501	Unaffected	N/A	≥ 400 lbf	> 1.0% Quarry	Unaffected

### Shade Variation



## APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	● †	■	■	● †	■	
Commercial	● †	■	■	● †	■	



## LEGEND

- Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- \* Special Order only



† The TCNA does not rate products for exterior floors. Project specifier must determine product suitability for exterior floor applications by evaluating specific project conditions, type of use, traffic, drainage, expected contaminants (such as water, oil, grease, etc.), wear, maintenance, and manufacturer's specifications and guidelines. Use caution--product may not be suitable for pool decks. Not suitable for ramps. No polished tiles; only textured surfaces may be suitable.

Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

