



Field Tile Sizes




**Core - COR**  
MIRBLUCOR1212V - 12"x12" Vintage Rectified - Matte  
MIRBLUCOR2424V - 24"x24" Vintage Rectified - Matte

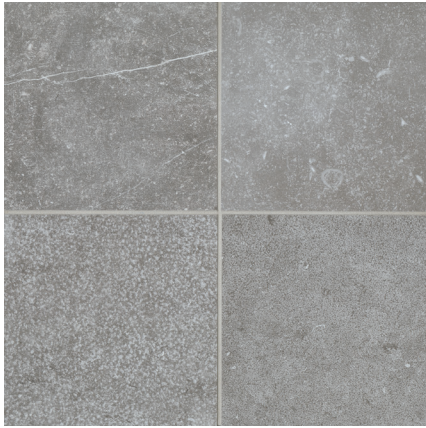


**Core - COR**  
MIRBLUCOR324V  
3"x24" Vintage Non-Rectified Field Tile - Matte

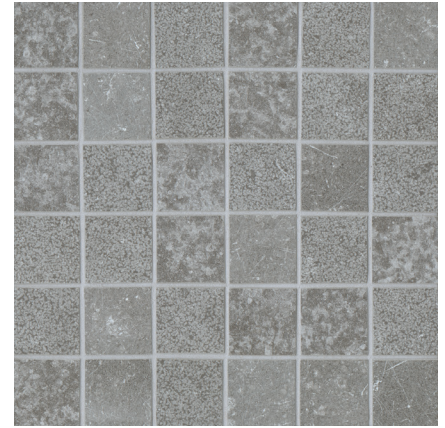


**Core - COR**  
MIRBLUCOR22VMO  
2"x2" Vintage Mosaic - Matte  
(12"x12" Sheet)

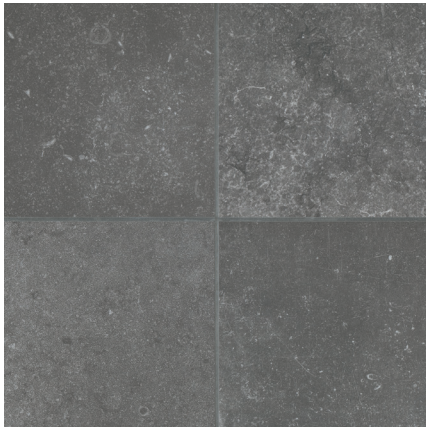

**Ego - EGO**  
MIRBLUEGO1212V - 12"x12" Vintage Rectified - Matte  
MIRBLUEGO2424V - 24"x24" Vintage Rectified - Matte

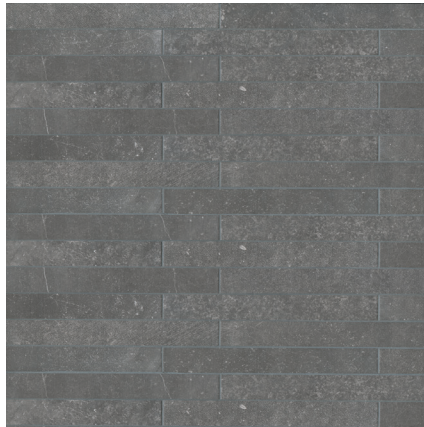

**Ego - EGO**  
MIRBLUEGO324V  
3"x24" Vintage Non-Rectified Field Tile - Matte

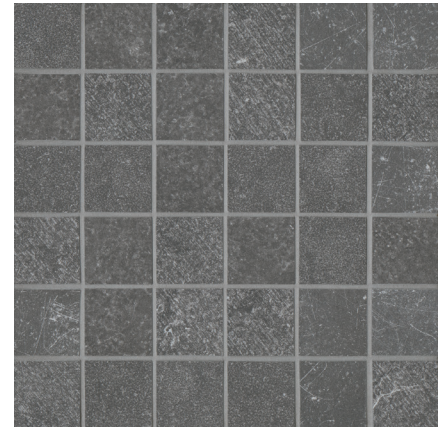

**Ego - EGO**  
MIRBLUEGO22VMO  
2"x2" Vintage Mosaic - Matte  
(12"x12" Sheet)





# Blues

## Glazed Color Body Porcelain

Photo Features 12"x12" Vintage Rectified Field Tile - Matte on Floor and 3"x24" Vintage Non-Rectified Field Tile - Matte on Backsplash in Core.


### SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		MIRBLU***324V	3"x24"	Vintage Non-Rectified Field Tile - Matte	22	10.66
		MIRBLU***1212V	12"x12"	Vintage Rectified Field Tile - Matte	12	11.63
		MIRBLU***2424V	24"x24"	Vintage Rectified Field Tile - Matte	3	11.63
Trim		MIRBLU***3X12VBN	3"x12"	Vintage Bullnose - Matte	10	-
		MIRBLU***3X24VBN	3"x24"	Vintage Bullnose - Matte	10	-
Mosaic		Ø MIRBLU***22VMO	12"x12" Sheet	2"x2" Vintage Mosaic - Matte	5	-

### ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	Pass ≤ 175 (ISO)	Unaffected	6	Pass ≥ 1,300N (ISO)	≤ 0.5%	Unaffected

Shade Variation




### APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	•	◻	◻	•	◻	◻
Commercial	•	◻	◻	•	◻	◻



### LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- \* Special Order only



Use of a leveling system during installation is strongly recommended

Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit [bedrosians.com](http://bedrosians.com) for current product information. We reserve the right to make product changes at any time without notice.

