


Field Tile Sizes



White - WHI
STPHIGWHI1224 - 12"x24" Non-Rectified Field Tile - Honed



Beige - BEI
STPHIGBEI1224 - 12"x24" Non-Rectified Field Tile - Honed

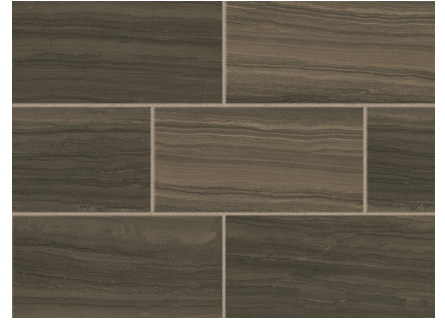

Cocoa - COC
STPHIGCOC1224 - 12"x24" Non-Rectified Field Tile - Honed



Greige - GRE
STPHIGGRE1224 - 12"x24" Non-Rectified Field Tile - Honed



Dark Greige - DAG
STPHIGDAG1224 - 12"x24" Non-Rectified Field Tile - Honed



Black - BLA
STPHIGBLA1224 - 12"x24" Non-Rectified Field Tile - Honed


2"x2" Mosaic - Honed (12"x12" Sheet)




White - WHI
STPHIGWHI22MO




Beige - BEI
STPHIGBEI22MO



Cocoa - COC
STPHIGCOC22MO



Greige - GRE
STPHIGGRE22MO




Dark Greige - DAG
STPHIGDAG22MO



Black - BLA
STPHIGBLA22MO


1"x4" Herringbone Mosaic - Honed (12"x12" Sheet)




White - WHI
STPHIGWHIHERMO



Beige - BEI
STPHIGBEIHERMO



Cocoa - COC
STPHIGCOCHERMO



Greige - GRE
STPHIGGREHERMO



Dark Greige - DAG
STPHIGDAGHERMO



Black - BLA
STPHIGBLAHERMO



Highland

Unglazed Color Body Porcelain

Photo Features 12"x24" Non-Rectified Field Tile - Honed in Greige.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		STPHIG***1224	12"x24"	Non-Rectified Field Tile - Honed	8	15.75
Trim		STPHIG***424BN	4"x24"	Bullnose - Honed	16	10.39
Mosaic		Ø STPHIG***HERMO	12"x12" Sheet	1"x4" Herringbone Mosaic - Honed	5	-
		Ø STPHIG***22MO	12"x12" Sheet	2"x2" Mosaic - Honed	10	-

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	4	Unaffected	7	≥ 400 lbf	≤ 0.5%	Unaffected


Shade Variation



V2-Slight

APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	◻	◻	●	◻	◻
Commercial	●	◻	◻	●	◻	◻




LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- * Special Order only



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL COMING UL 2818



Use of a leveling system during installation is strongly recommended

For installation of all polished, polished glazed, lappato, and honed porcelain/ceramic tiles, use a grout release prior to grouting to prevent absorption of the grout into the tile's micropores. Use a grout color that matches the predominant color of the tile. Refer to grout manufacturer's specifications to ensure use of proper grout. Refer to tile manufacturer's specifications to determine if the polished or honed tile is appropriate for commercial applications. Tiles with a polished finish are not appropriate for wet or exterior floor applications. Do not use acidic cleaners.

Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

