

Field Tile Sizes




Nova White - NOV
STPURBNOV1224 - 12"x24" Rectified Honed
STPURBNOV2424 - 24"x24" Rectified Honed
STPURBNOV2448 - 24"x48" Rectified Honed



Iron Blue - IRO
STPURBIRO1224 - 12"x24" Rectified Honed
STPURBIRO2424 - 24"x24" Rectified Honed
STPURBIRO2448 - 24"x48" Rectified Honed



Lava Grey - LAV
STPURBLAV1224 - 12"x24" Rectified Honed
STPURBLAV2424 - 24"x24" Rectified Honed
STPURBLAV2448 - 24"x48" Rectified Honed

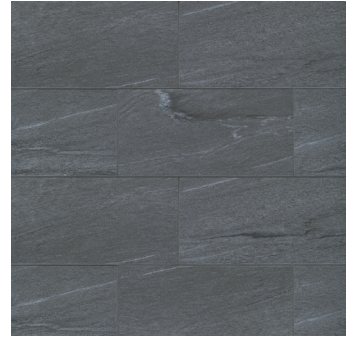

Raven Black - RAV
STPURBRAV1224 - 12"x24" Rectified Honed
STPURBRAV2424 - 24"x24" Rectified Honed
STPURBRAV2448 - 24"x48" Rectified Honed

2"x2" Mosaic - Honed (12"x12" Sheet)




Nova White - NOV
STPURBNOV22MO



Iron Blue - IRO
STPURBIRO22MO



Lava Grey - LAV
STPURBLAV22MO

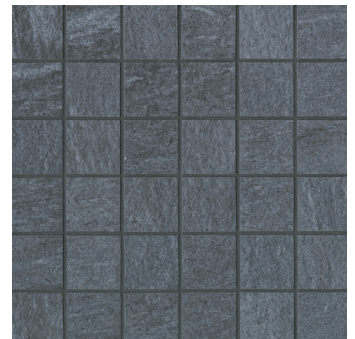

Raven Black - RAV
STPURBRAV22MO



Urban 2.0

Glazed Color Body Porcelain

Photo Features 24"x48" Rectified Field Tile - Honed in Flaven Black and Nova White.


SIZING & PACKAGING

| Type | Shape | Item Code | Size | Description | Pcs / Ctn | Sf / Ctn |
|--------|-------|-----------------|---------------|------------------------------|-----------|----------|
| Field | | STPURB***1224 | 12"x24" | Rectified Field Tile - Honed | 8 | 15.75 |
| | | STPURB***2424 | 24"x24" | Rectified Field Tile - Honed | 4 | 15.83 |
| | | STPURB***2448 | 24"x48" | Rectified Field Tile - Honed | 4 | 31.67 |
| Trim | | STPURB***324BN | 3"x24" | Bullnose - Honed | 16 | - |
| Mosaic | | Ø STPURB***22MO | 12"x12" Sheet | 2"x2" Mosaic - Honed | 5 | - |

ANSI TECHNICAL SPECIFICATIONS

| | DCOF Acutest | PEI Rating ASTM# C1027 | Frost Resistant ASTM# C1026 | Scratch Resistance MOHS | Breaking Strength ASTM# C648 | Water Absorption ASTM# C373 | Chemical Resistance ASTM# C650 |
|---------|--------------|------------------------|-----------------------------|-------------------------|------------------------------|-----------------------------|--------------------------------|
| Results | ≥ 0.42 | Pass ≤ 175 (ISO) | Unaffected | 7 | ≥ 250 lbf | ≤ 0.5% | Unaffected |


Shade Variation



V3-Moderate


APPLICATIONS

| | Floors | Walls | Countertops | Shower Floors | Shower Walls | Pools/Spas |
|-------------|--------|-------|-------------|---------------|--------------|------------|
| Residential | ● | ◻ | ◻ | ● | ◻ | ◻ |
| Commercial | ● | ◻ | ◻ | ● | ◻ | ◻ |



LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- Ø Applications & ANSI Technical Specifications do not apply
- * Special Order only



Use of a leveling system during installation is strongly recommended

Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

MKTTERSTPURB
REV. 7.2021

bedrosians.com

