

Field Tile Sizes



White - W
TCRISL36W - 12"x24" Matte
TCRISL49W - 18"x36" Matte



Beige - B
TCRISL36B - 12"x24" Matte
TCRISL49B - 18"x36" Matte



Silver - S
TCRISL36S - 12"x24" Matte
TCRISL49S - 18"x36" Matte

1 1/2"x1 1/2" Mosaic - Matte (10"x12" Sheet)



White - W
TCRISL15W



Beige - B
TCRISL15B




Silver - S
TCRISL15S


2"x6" Chevron Mosaic - Matte (9 1/2"x11 3/4" Sheet)



White - W
TCRISLCHVW

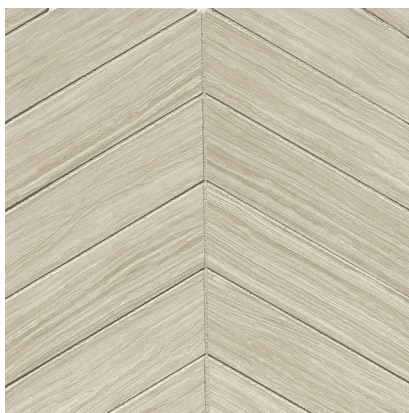

Beige - B
TCRISLCHVB

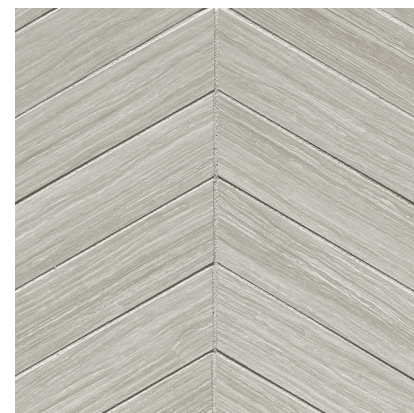






Silver - S
TCRISLCHVS

Islands

Glazed Porcelain

Photo Features 12"x24" Field Tile - Matte in Silver.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		TCRISL36*	12"x24"	Field Tile - Matte	9	18.00
		TCRISL49*	18"x36"	Field Tile - Matte	4	18.00
Trim		TCRISLS324*	3"x24"	Surface Bullnose - Matte	26	-
Mosaic		TCRISLCHV*	9 1/2"x11 3/4" Sheet	2"x6" Chevron Mosaic - Matte	14	-
		TCRISL15*	10"x12" Sheet	1 1/2"x1 1/2" Mosaic - Matte	11	-

ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	N/A	4	Unaffected	7	≥ 450 lbf	≤ 0.5%	Unaffected

Shade Variation




APPLICATIONS

	Floors	Walls	Countertops	Shower Floors (1 1/2"x1 1/2" Mosaic Only)	Shower Walls	Pools/Spas
Residential	●	◐	◐	●	◐	
Light Commercial	●	◐	◐		◐	
Commercial		◐	◐		◐	



LEGEND

- ◐ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ⊘ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field and trim tile may not be an exact match. We reserve the right to make changes to product specifications at any time without notice. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Reference the most current TCNA Handbook, ANSI, manufacturer's specifications, and the Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, application, and/or use voids warranty. Please visit www.bedrosians.com for current product information.

