

8"x8 Decorative Ceramic Tile - Matte



A2
TCRTUS88A2



A1
TCRTUS88A1



A3
TCRTUS88A3



B1
TCRTUS88B1



B3
TCRTUS88B3



B2
TCRTUS88B2



C3
TCRTUS88C3




C1
TCRTUS88C1



C2
TCRTUS88C2

8"x8" Decorative Ceramic Tile - Matte (cont.)

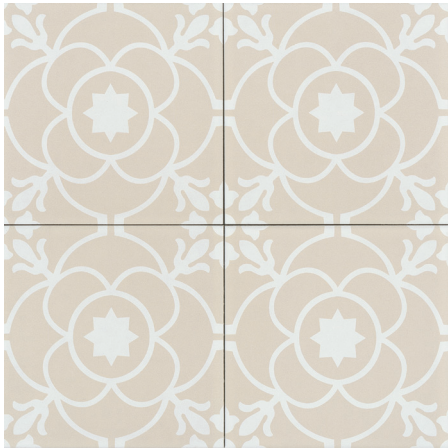

D2
TCRTUS88D2



D3
TCRTUS88D3




D1
TCRTUS88D1

SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		TCRTUS88**	8"x8"	Decorative Ceramic Tile - Matte	30	12.91

ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	N/A	3	N/A	5	≥ 250 lbf	>1.0% Ceramic	Unaffected



APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	●	●		●	
Commercial		●			●	








Glazed Ceramic



Non-Rectified

LEGEND

-  Product rated for Interior & Exterior use
-  Product rated for Interior use only
-  † May be suitable for Exterior Floors
-  Applications & ANSI Technical Specifications do not apply
-  * Special Order only



Ink Jet

The tile pattern displays best with 1/16" to 1/8" grout joints.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

